

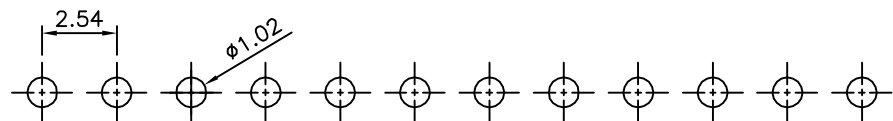
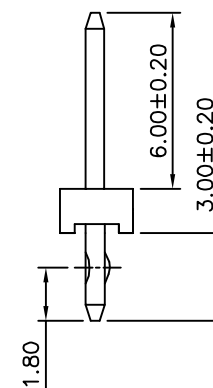


SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

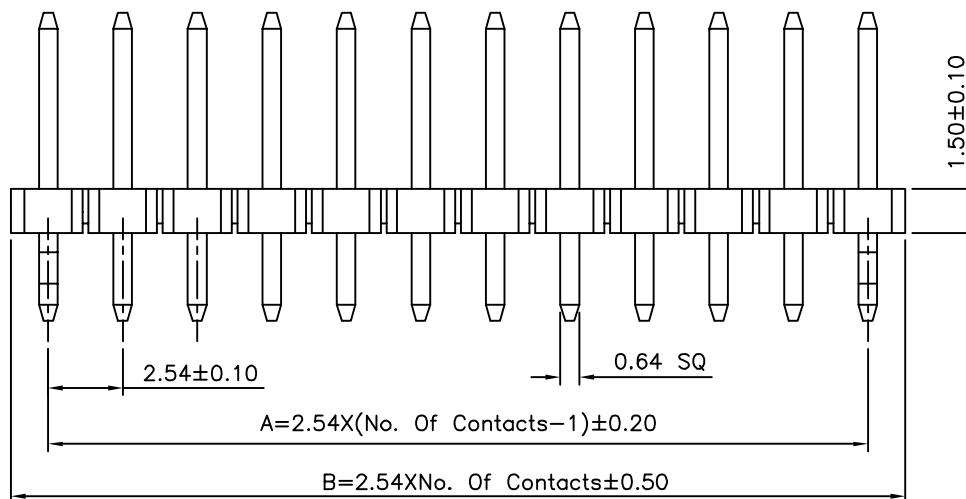

Recommended P.C.B. Layout
 Tolerance:±0.05

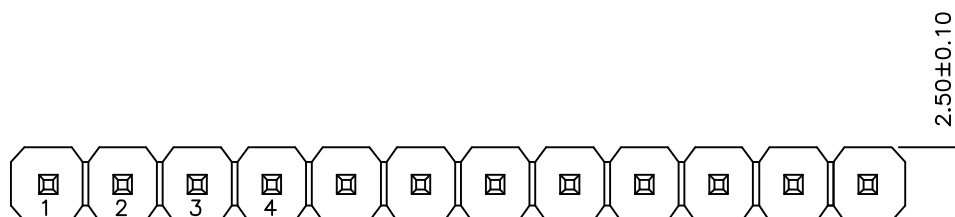

Pin	A	B	Pin	A	B
01	—	2.54	21	50.80	53.34
02	2.54	5.08	22	53.34	55.88
03	5.08	7.62	23	55.88	58.42
04	7.62	10.16	24	58.42	60.96
05	10.16	12.70	25	60.96	63.50
06	12.70	15.24	26	63.50	66.04
07	15.24	17.78	27	66.04	68.58
08	17.78	20.32	28	68.58	71.12
09	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20649

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG.

UNIT
 mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

06/30/2014

CHK

DATE